
EVENTRONIC
The AudioVisual Engineers

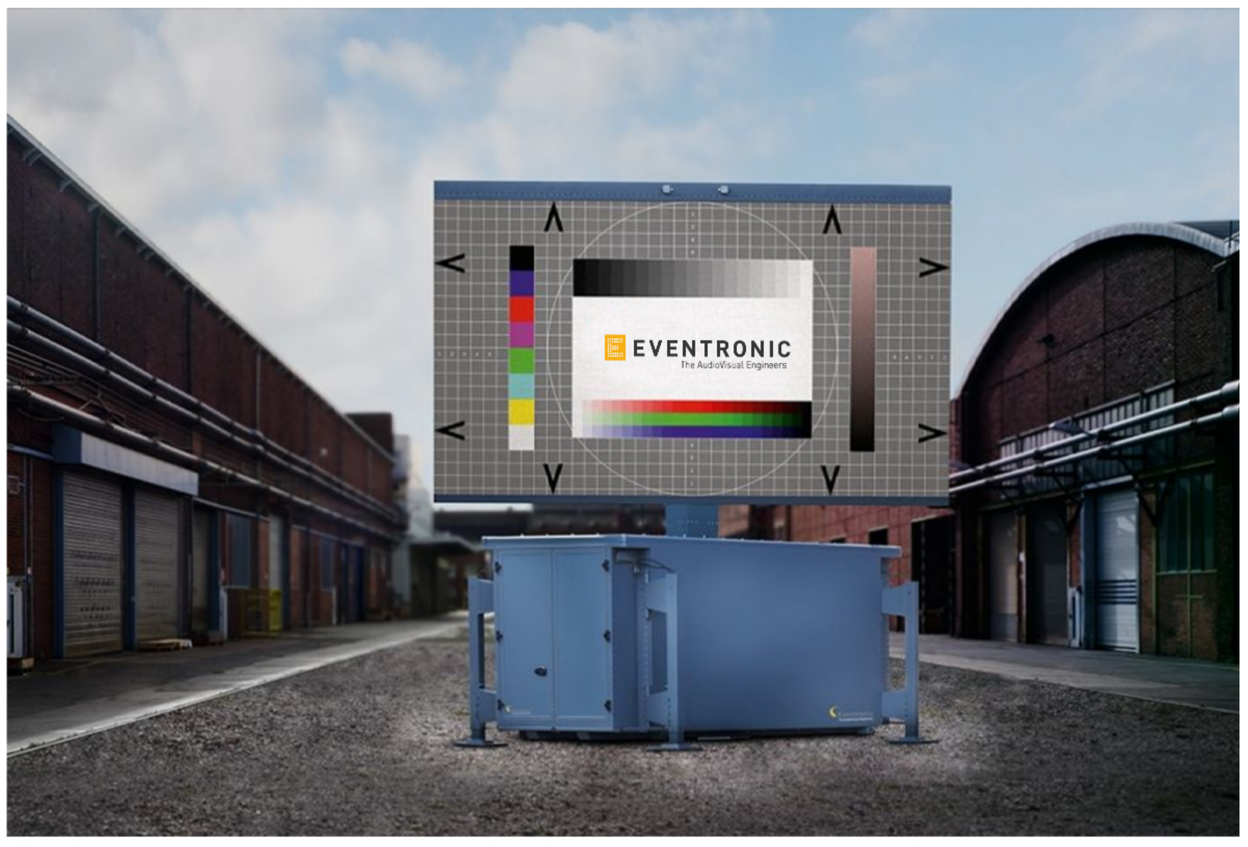

EVIWA® 30

Extended Video Wall

Technical Data:

- 31m² AOTO 5mm LED-Screen
- Nuanced color reproduction
- Integrated soundproof generator
- Brightness: 6000 Nits
- Pixelpitch: 5 [mm]
- Color depth: 16 [bit]
- Refresh rate: 3.840 [Hz]
- Image format: 16:9
- Input signals: 3G-SDI, HD SDI, HDMI, DVI, VGA, CV
- IP rating: IP65
- External power connection: 63A CEE
- Bottom edge LED Display: ca. 3,20 [m] - 4,70 [m]
- Top edge LED Display: ca. 7,20 [m] - 8,7 [m]
- Display size: B 7,2 [m] x H 4,32 [m] = 31,1 [m²]
- Display resolution: 1230p x 738p
- Viewing angle: horizontal 160° vertikal 120°
- 360° freely swiveling screen
- Height-adjustable container
- Container weight: ca. 12[t]
- Container weight including truck: 22 [t]
- Permissible wind load: 7 [Bft] = 15 [m/s]
  -Installation inland: wind zones 1–4
  -Installation at the North and Baltic Sea coasts: wind zones 2–4
  -Installation on Baltic Sea islands: wind zone 2
- Operable by a technician

Eventronic® GmbH & Co.KG
HRA Aachen 6807
USt-IDNr.: DE254934542

e-mail: info@eventronic.de
web: www.eventronic.de

Kölner Straße 2
52152 Simmerath
Germany

phone: +49 (0) 2473 92878-0
fax: +49 (0) 2473 92878-99

Geschäftsführer:
Jürgen Johnen

EVIWA®

Extended Video Wall

